



AirLINE and AirLINE Quick – electrical/pneumatic Automation System – WAGO

Remote I/O and Fieldbus modules

- Fully compatible with WAGO I/O System 750
- Combination of Fieldbus, pilot valves and I/O modules
- higher flexibility in the control cabinet with AirLINE Quick
- Compact design
- High flow rate value

Type 8644 can be combined with...




Type 8032
Switch



Type 6212
Solenoid valve



Type 2012
Process valve



Type 8630
Valve controller



Type 1062
Position feedback

The AirLINE System integrates high performance solenoid pilot valves, remote electronic I/O and fieldbus communication into a process actuation and control system that is both compact and extremely flexible. Its modular design allows fully customized, pre-mounted and tested

solutions to exactly meet all application needs including the integration of a local Mini PLC. Due to the full electronic and mechanical integration, the valve block can be added without the need of any tools or wiring.


Technical data	Pilot valve	
	0460, 6524, 6525 	0461, 6526, 6527 
width/station	11 mm	16.5 mm
Circuit function	C (3/2) D (3/2) H (5/2) H (5/2) impulse L (5/3) in middle position all ports closed N (5/3) in middle position all ports vented	C (3/2) D (3/2) H (5/2) H (5/2) impulse L (5/3) in middle position all ports open N (5/3) in middle position all ports vented
Flow rate	300 l/min ¹⁾	700 l/min (500 l/min for functions H impulse, L and N)
Pressure range	Vac. up to 10 bar	Vac. up to 10 bar
module types	2x and 8x (optional integrated check valves and p-shut-off-valve)	2x and 4x (optional integrated check valves) Combination of 11 mm modules (3 valves) and 16.5 mm modules is possible
Max. number of modules	Depending on application	Depending on application
Max. number of valves	64 (by use of Type 0460 & Type 6524 2 x 3/2 way valve: 32)	32 (by use of Type 0461: 24)
Pneumatic intermediate supply	necessary after 24 valve functions; with 2 x 3/2 way valve: necessary after 16 valve functions	necessary after 16 valve functions
Fieldbus type	PROFIBUS DP, INTERBUS, DeviceNet, CANopen, Ethernet, further on request	PROFIBUS DP, INTERBUS, DeviceNet, CANopen, Ethernet, further on request
Electrical modules	WAGO I/O System 750	WAGO I/O System 750
Digital modules	2 or 4 inputs 2 or 4 outputs, others on request	2 or 4 inputs 2 or 4 outputs, others on request
Analogue modules	2 or 4 inputs (0-10 V, 0-20 mA, 4-20 mA, RTD, TC) 2 outputs (0-10 V, 0-20 mA, 4-20 mA) others on request	2 or 4 inputs (0-10 V, 0-20 mA, 4-20 mA, RTD, TC) 2 outputs (0-10 V, 0-20 mA, 4-20 mA) others on request

¹⁾Maximum flow rate depending on valve function - see tables on pages 3 to 6.


to be continued on page 2

Technical data	Pilot valve types	
	0460, 6524, 6525 	0461, 6526, 6527 
Analogue modules	2 or 4 inputs (0-10 V, 0-20 mA, 4-20 mA, RTD, TC) 2 outputs (0-10 V, 0-20 mA, 4-20 mA) others on request	2 or 4 inputs (0-10 V, 0-20 mA, 4-20 mA, RTD, TC) 2 outputs (0-10 V, 0-20 mA, 4-20 mA) others on request
Operating voltage	24 V DC	24 V DC
Ripple	1 Vss	1 Vss
Nominal power per valve	1 W (0.5 W nominal power after 120 ms)	2 W (1 W nominal power after 120 ms)
Rated current per valve	43 mA (28 mA holding current after 120 ms) 41mA (by use of Type 0460)	85 mA (52 mA holding current after 120 ms) 41mA (by use of Type 0461)
Temperatures Environment Storage	0 to +55 °C (by use of Type 0460: 0 to +50 °C) -20 to +60 °C	0 to +55 °C (by use of Type 0461: 0 to +50 °C) -20 to +60 °C
Protection class	IP20 IP65 in closed field housing	IP20 IP65 in closed field housing
Approvals	Zone 2	on request

Application example

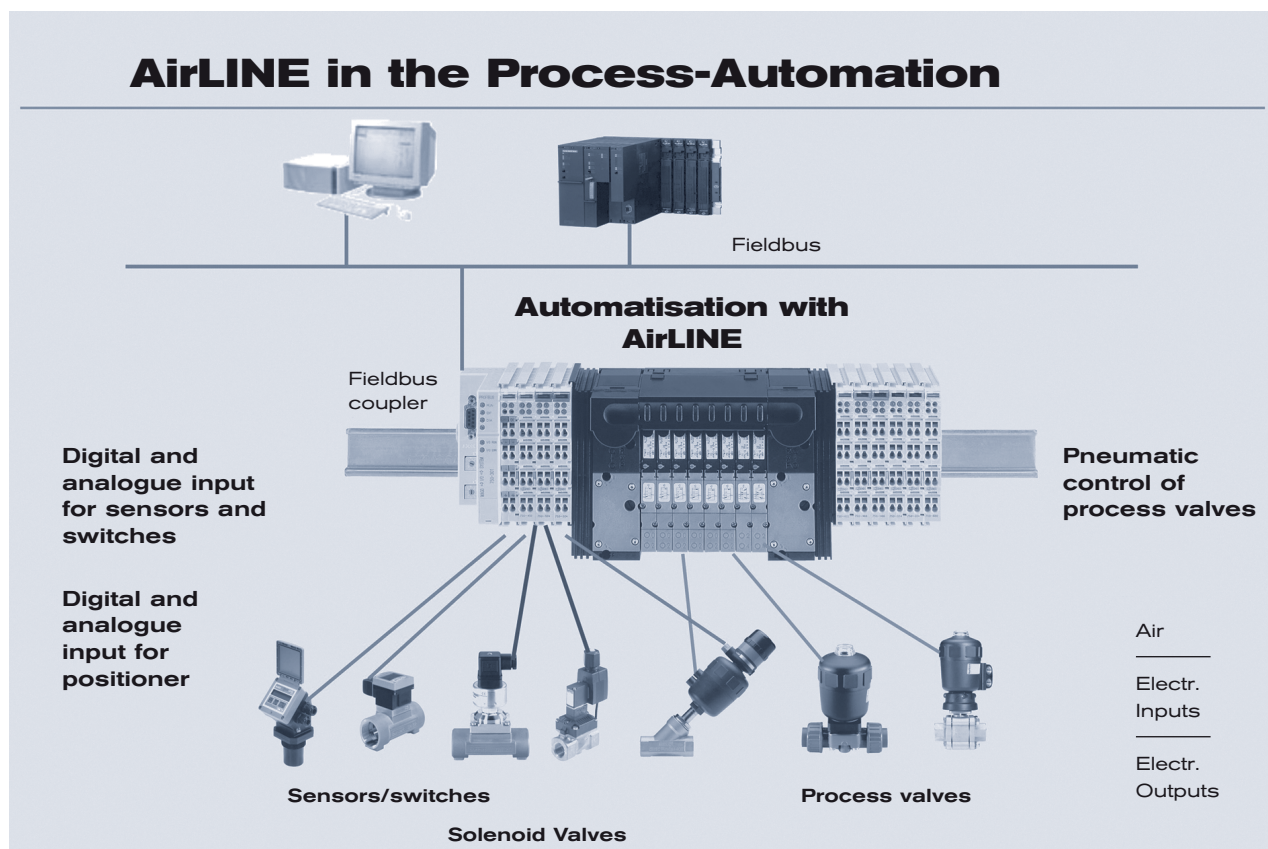

11 mm width/station Solenoid Valves 6524 and 6525

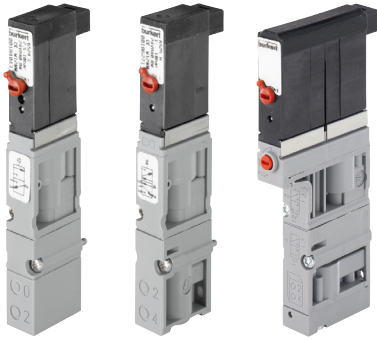

The solenoid valve Types 6524 and 6525 consist of a pneumatic valve body fitted with Type 6104 rocker pilot valve. The principle allows switching of high pressures together with low power consumption and fast response times. The pilot valves are equipped with manual override as a standard.

Specification	3/2 way valve	2 × 3/2 way valve
Body material	PA (Polyamide)	
seal materials	FPM, NBR and PUR	
Medium	lubricated and non lubricated dry compressed air; neutral gases (5 µm-Filter)	
Port connections	Flange for MP11	
Pneumatic module	Type MP11 with push-in connection Diameter 6 mm, D1/4 Threaded port M7	
Manual override	Standard	
Operating voltage	24 V DC	
Nominal power	0.8 W	2 × 0.8 W with reduction of power consumption
Duty cycle	Continuous operation (100% ED)	
Electr. connection on valve	Rectangular plug 2 pin grid spacing 5.08 mm	Rectangular plug 3 pin grid spacing 2.54 mm
Mounting	with 2 screws M2 × 20	with 2 screws M2 × 28
Installation	As required, preferably with actuator upright	
Flow rate: Q_{Nn} value air [l/min]	Measured at + 20 °C, 6 bar pressure at valve inlet and 1 bar pressure difference	
Pressure values [bar]:	Overpressure with respect to atmospheric pressure	
Response times [ms]:	Measured according to ISO 12238	

Ordering chart for valves

Control function	Orifice [mm]	Q_{Nn} value air [l/min] ¹⁾	Pressure range [bar]	Response times		Voltage/Frequency [V/Hz]	Article no.
				Opening [ms]	Closing [ms]		
C 3/2 way servo-controlled solenoid valve, normally closed, with manual override	4	300	Vac.- 7	15	20	24 V DC *	186258
			1 - 10 ²⁾	15	20	24 V DC *	186257
			2.5 - 10	15	28	24 V DC *	184043
D 3/2 way servo-controlled solenoid valve, normally open, with manual override			2.5 - 10	15	28	24 V DC *	184400
H 5/2 way servo-controlled solenoid valve, pilot air and manual override	4	300	1.0 - 10 ²⁾	15	20	24 V DC *	186271
			2, 5 - 10	20	28	24 V DC *	179938
C 2 × 3/2 way servo-controlled solenoid valve, normally closed, with manual override	4	300	1.0 - 10 ²⁾	12	20	24 V DC *	186259
			2.5 - 10	12	20	24 V DC *	186260

¹⁾ With integrated HotSwap and/or non-return function, the flow rate is reduced.

²⁾ Version with auxiliary pilot air

³⁾ Version with integrated reduction of power consumption

* 10% residual ripple allowed




11 mm width/station: pilot valve Type 0460




The solenoid valve Type 0460 consists of a pneumatic valve body fitted with a double coil pilot valve. The principle allows switching of high pressures together with low power consumption and fast response times. All valves are equipped with manual override as a standard.

Technical data	
Body material	Aluminium
Seal material	NBR
Medium	lubricated and non lubricated dry compressed air; Neutral gases (5µm filter recommended)
Port connections	Flange
Pneumatic module	MP11
Supply port connection 1 (P), 3 (R), 5 (S)	G ¼ NPT ¼ Push-in Ø 10 mm
Service port 2 (A), 4 (B)	Push-in Ø 6 mm Push-in Ø ¼" Threaded port M7
Operating voltage	24 V DC
Electrical connection at the valve	Rectangular plug
Manual override	standard
Flow rate: Q_{Nn} value air [l/min]	Measured at + 20 °C, 6 bar pressure at valve inlet and 1 bar pressure difference
Pressure values [bar]	Measured as overpressure to the atmospheric pressure
Response times [ms]	Measured according to ISO 12238

Ordering chart for valves

Control function	Orifice [mm]	Q_{Nn} value air [l/min]:	Pressure range [bar]	Nominal power [W]	Response times		Article no.
					OPENING [ms]	Closing [ms]	
Z  5/2 way solenoid valve, with 2 impulse coils and manual override	2.5	200	2.0 - 7.0	1	15	15	154183 
L  5/3 way solenoid valve, in middle position all ports locked, with manual override	2.5	200	2.0 - 7.0	1	15	20	154184 
N  5/3 way valve, in middle position ports 2 and 4 exhausted, with manual override	2.5	200	2.0 - 7.0	1	15	20	154185 

16.5 mm width/station Solenoid Valves 6526 and 6527

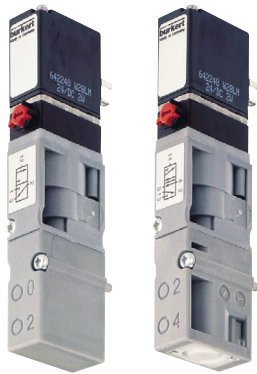

The solenoid valve Types 6526 and 6527 consist of a pneumatic valve body fitted with Type 6106 rocker pilot valve. The principle allows switching of high pressures together with low power consumption and fast response times. The pilot valves are equipped with manual override as a standard.

Specification	
Body material	PA (Polyamide)
seal materials	NBR
Medium	lubricated and non lubricated dry compressed air; neutral gases (10 µm filter)
Port connections	Flange for MP12
Pneumatic module	Type MP12 with G 1/8, Push-in Ø 8 mm NPT 1/8
Manual override	Standard
Operating voltage	24 V DC
Nominal power	2 W, 1 W
Duty cycle	Continuous operation 100%
Electr. connection on valve	Tag connector acc. to DIN EN 175301-803 (previously DIN 43650) Form C
Mounting	with 2 screws M3 × 30
Installation	As required, preferably with actuator upright
Flow rate: Q_{Nn} value air [l/min]:	Measured as overpressure to the atmospheric pressure 1 bar pressure difference
Pressure values [bar]	Measured as overpressure to the atmospheric pressure
Response times [ms]	Measured according to ISO 12238

Ordering chart for valves

Control function	Orifice [mm]	Q_{Nn} value air [l/min]	Pressure range [bar]	Nominal power [W]	Response times		Voltage/Frequency [V/Hz]	Article no.
					Opening [ms]	Closing [ms] ²⁾		
C 3/2 way servo-controlled solenoid valve, normally closed, with manual override	6	700	1.0 - 10 ¹⁾	2	20	12	24 V DC	156842
			1.0 - 10 ¹⁾	2	20	12	24 V DC	163028 ²⁾
			2.0 - 10	2	20	12	24 V DC	156318
			2.0 - 10	2	20	12	24 V DC	158944 ²⁾
			2.0 - 8.0	1	20	17	24 V DC	156840
D 3/2 way servo-controlled solenoid valve, normally open, with manual override	6	700	1.0 - 10 ¹⁾	2	20	12	24 V DC	163029 ²⁾
			2.0 - 10	2	12	20	24 V DC	156320
			2.0 - 10	2	20	12	24 V DC	158946 ²⁾
			2.0 - 8.0	1	17	20	24 V DC	156841
H 5/2 way servo-controlled solenoid valve, pilot air and manual override	6	700	1.0 - 10 ¹⁾	2	20	12	24 V DC	156828
			1.0 - 10 ¹⁾	2	20	12	24 V DC	163030 ²⁾
			2.0 - 10	2	20	12	24 V DC	156337
			2.0 - 10	2	20	12	24 V DC	158942 ²⁾
			2.0 - 8.0	1	20	17	24 V DC	156827
			2.0 - 8.0	1	20	12	24 V DC	158943 ²⁾

²⁾ Electric connection with manual override.

³⁾ Closing time approx. 5 ms higher when used together with valve unit

16.5 mm width/station: pilot valve Type 0461



The solenoid valve Type 0461 consists of a pneumatic valve body fitted with a double coil pilot valve. The principle allows switching of high pressures together with low power consumption and fast response times. All valves are equipped with manual override as a standard.


Technical data	
Body material	Aluminium
Seal material	NBR
Medium	lubricated and non lubricated dry compressed air; neutral gases (10µm filter recommended)
Port connections	Flange
Pneumatic module	MP12
Supply port connection 1 (P), 3 (R), 5 (S)	G 3/8 NPT 3/8
Service port 2 (A), 4 (B)	G 1/8 NPT 1/8 Push-in connection Ø 8 mm
Operating voltage	24 V DC
Electrical connection at the valve	Rectangular plug
Manual override	standard
Flow rate: Q _{Nn} value air [l/min]	Measured at + 20 °C, 6 bar pressure at valve inlet and 1 bar pressure difference
Pressure values [bar]	Measured as overpressure to the atmospheric pressure
Response times [ms]	Measured according to ISO 12238

Ordering chart for valves

Circuit function	Orifice [mm]	Q _{Nn} value air [l/min]:	Pressure range [bar]	Nominal power [W]	Response times		Article no.
					OPENING [ms]	Closing [ms]	
Z 5/2 way solenoid valve, with 2 impulse coils and manual override	6	500	2.5 - 7.0	1	20	30	156766
L 5/3 way solenoid valve, in middle position all ports locked, with manual override	6	500	2.5 - 7.0	1	15	50	156767
N 5/3 way valve, in middle position ports 2 and 4 exhausted, with manual override	6	500	2.5 - 7.0	1	15	50	156768

AirLINE Quick

With AirLINE Quick you can reduce the amount of the components in the control cabinet considerably. With the AirLINE Quick Adapter the valve island is directly adapted on the control cabinet floor or wall.

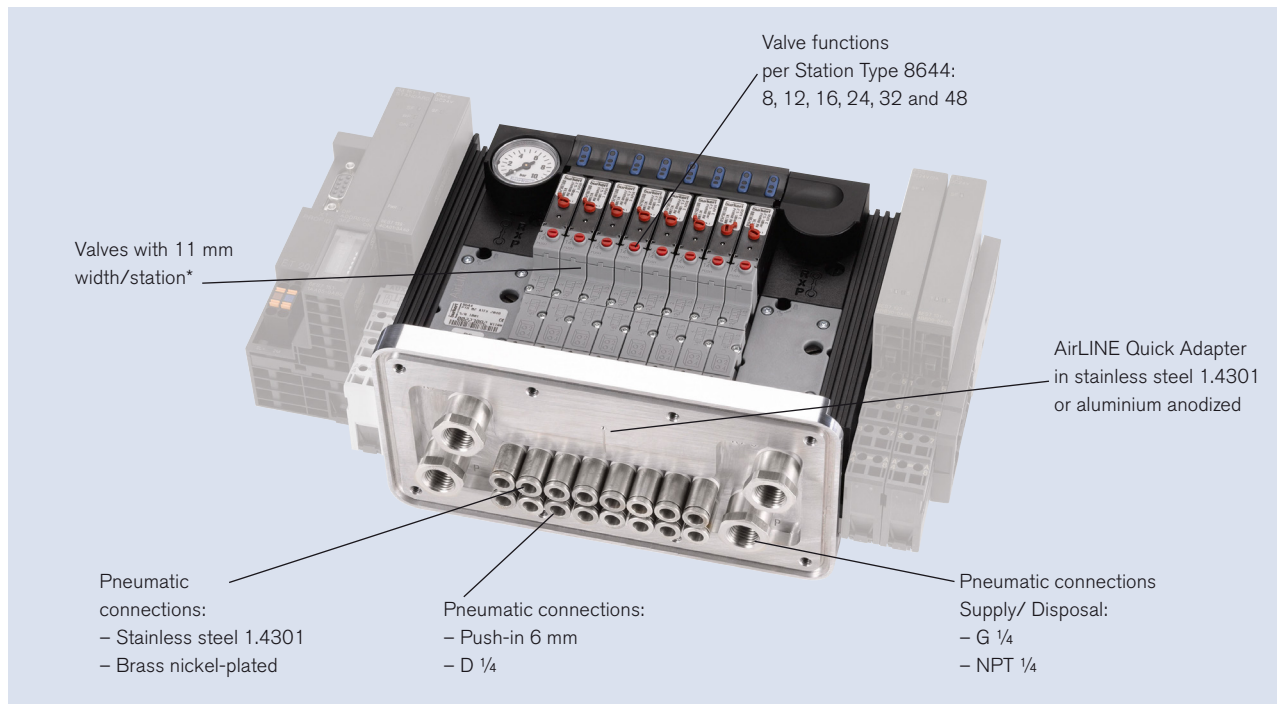

* The valves of Type 0460 can not be installed with AirLINE Quick because of their size.


Technical data

Technical data	
Material AirLINE Quick Adapter	stainless steel 1.4301 aluminium anodized
Material pneumatic connection	stainless steel 1.4301 Brass nickel-plated
Connection pneumatic feeding	G 1/4, NPT 1/4
Connection pneumatic service ports	Push-in D6 mm, D1/4"
Installation	Control cabinet wall Control cabinet floor
Valve functions per station	8, 12, 16, 24, 32 and 48

Additional accessories for AirLINE Quick

Blanking plates

A blanking plate is used to cover an existing flange for AirLINE Quick on the cabinet wall or on the cabinet floor.

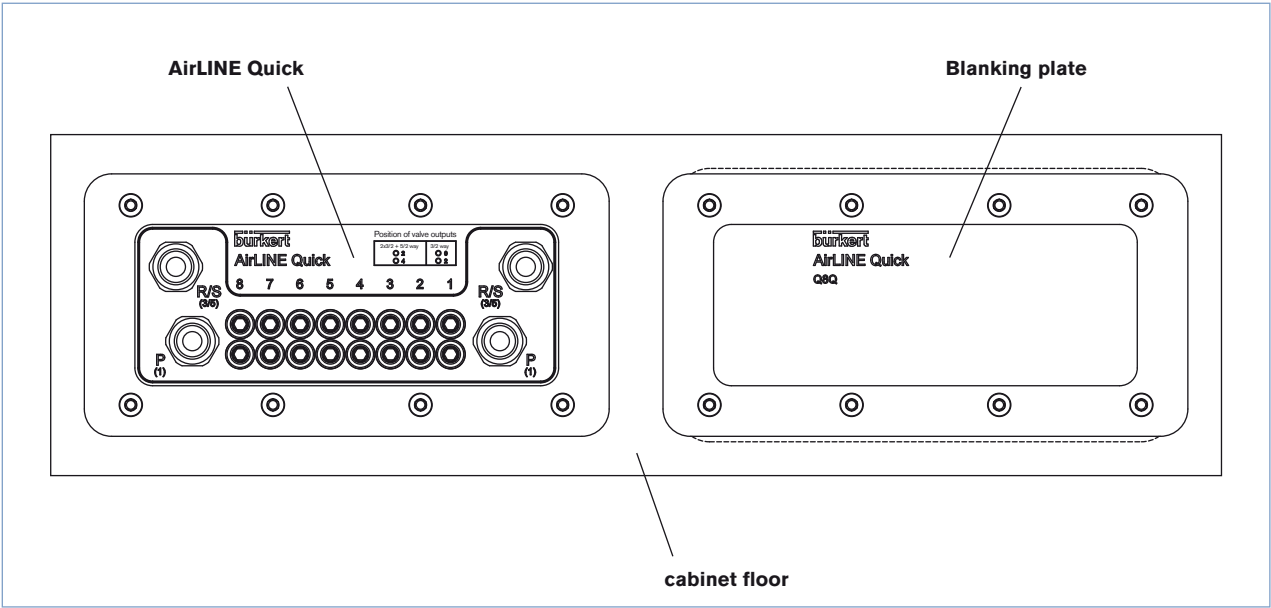


Ordering chart blanking plates


Material	Amount of valve slots	Article no.
Aluminium anodized	8	246933
	12	246929
	16	246925
	16*	246935
	24	246927
	24*	246931
Stainless steel 1.4301	8	246934
	12	246930
	16	246926
	16*	246936
	24	246928
	24*	246932

* with intermediate pneumatic supply module

Integration of AirLINE Quick in WAGO I/O System 750

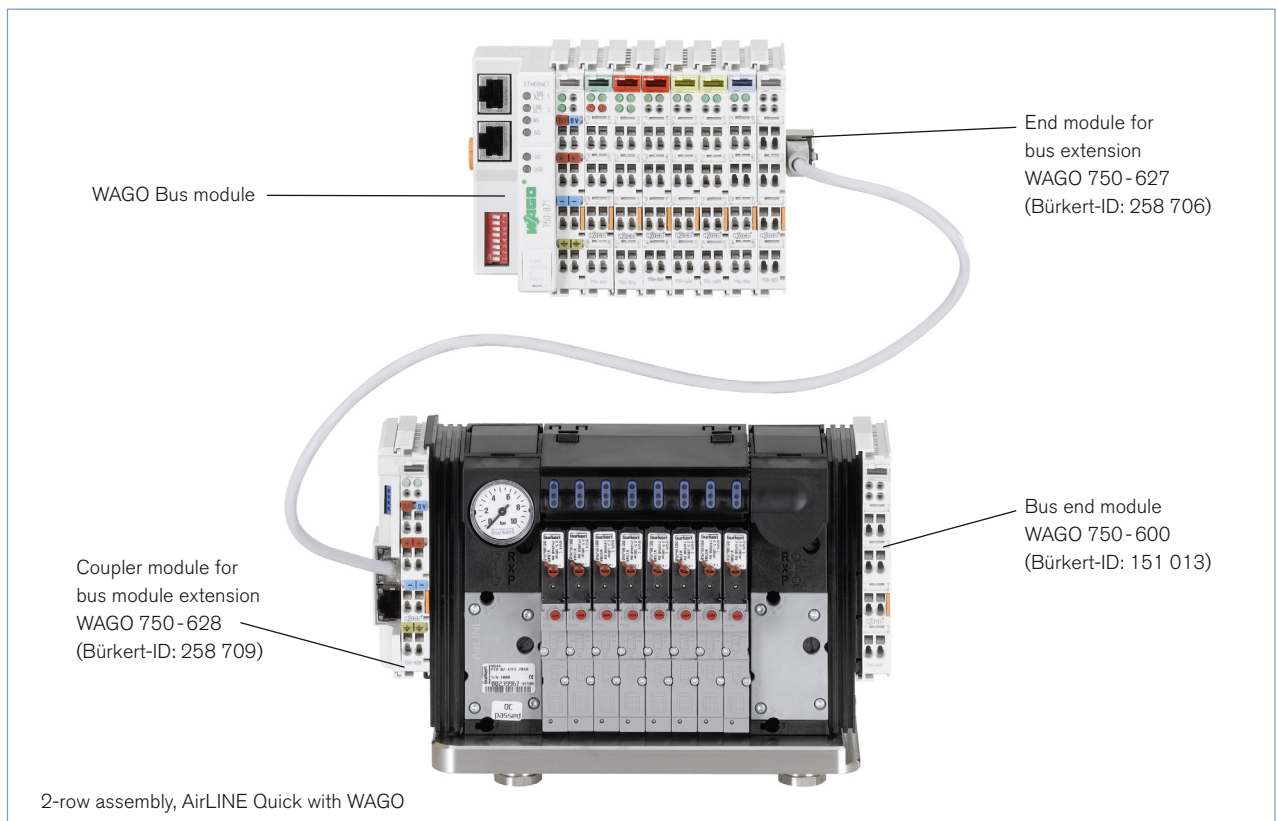


Pneumatic module and electrical interfaces for modules series 750 WAGO

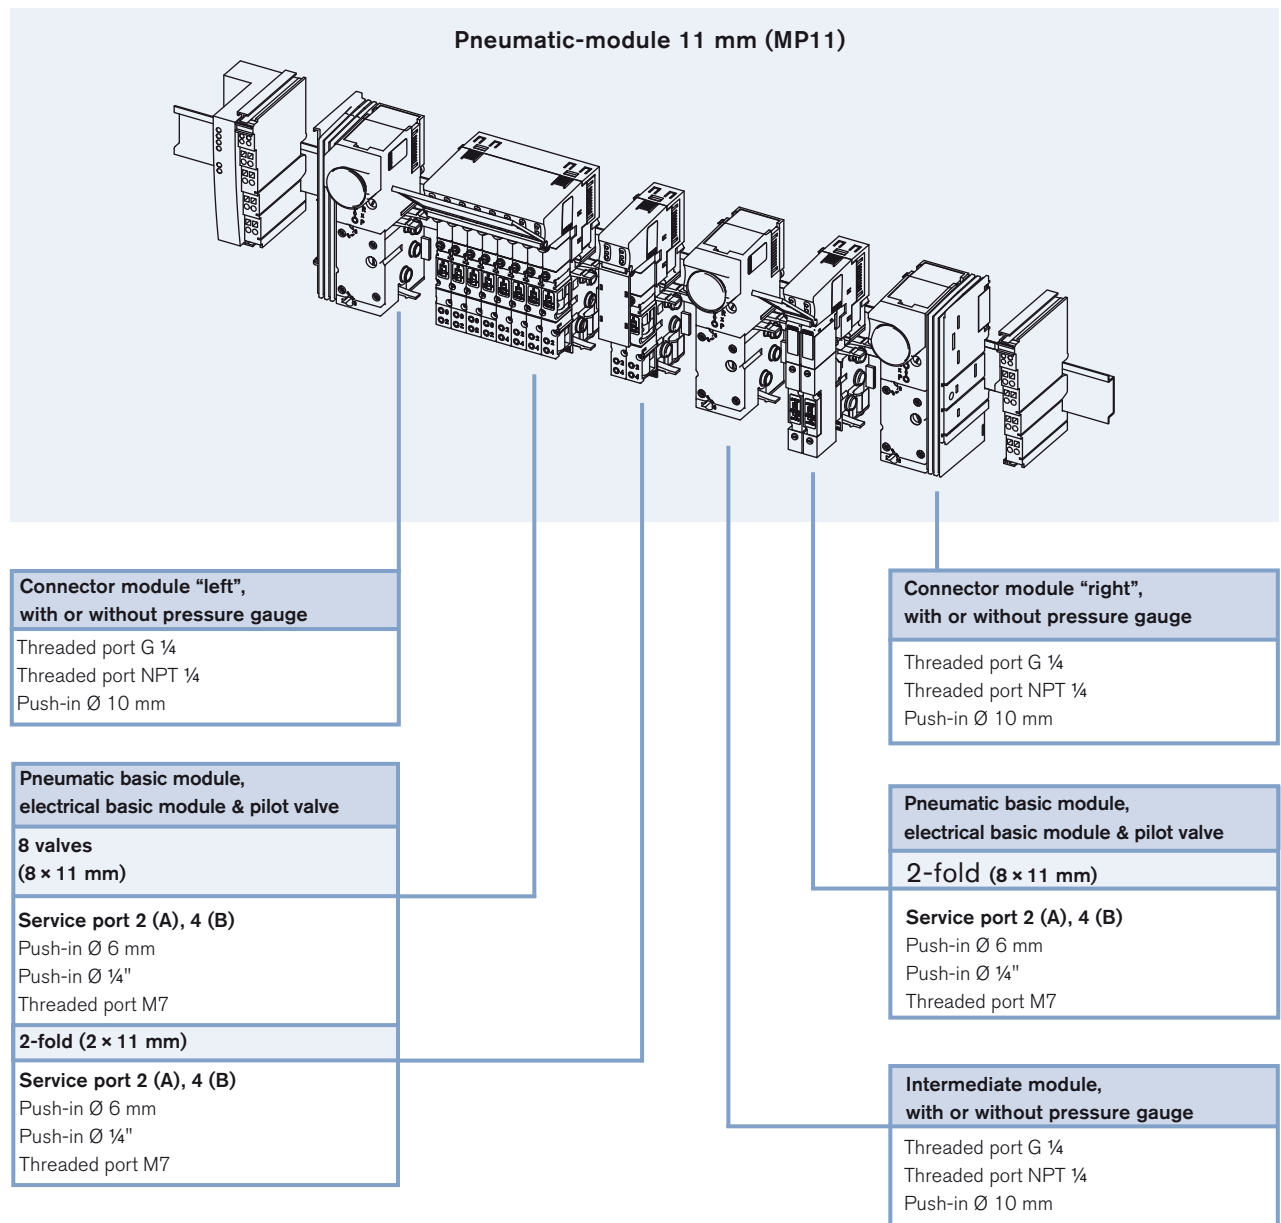

Pneumatic module and electrical interfaces for modules series 750 WAGO

Pneumatic-module 16.5 mm (MP12)

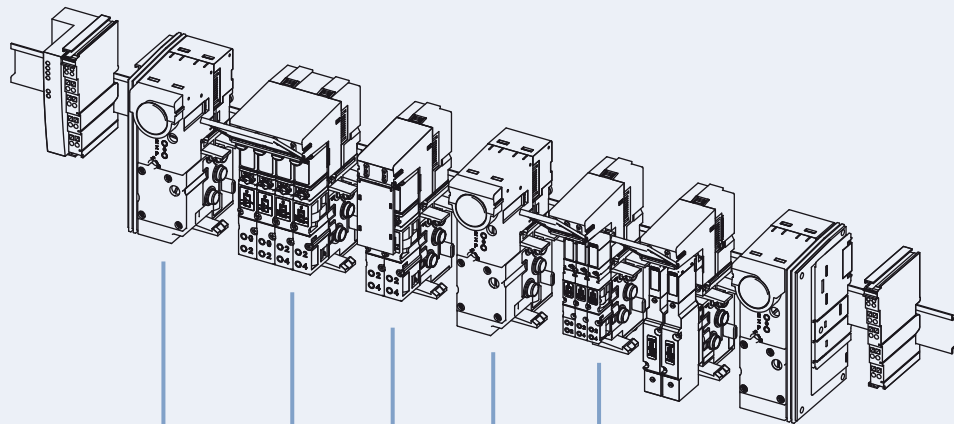

**Connector module "left",
with or without pressure gauge**

Threaded port G $\frac{3}{8}$
Threaded port NPT $\frac{3}{8}$

**Pneumatic basic module,
electrical basic module & pilot valve**

4-fold (4 × 16.5 mm)

Service port 2 (A), 4 (B)

Threaded port G $\frac{1}{8}$
Threaded port NPT $\frac{1}{8}$
Push-in Ø 8 mm

2-fold (2 × 16.5 mm)

Service port 2 (A), 4 (B)

Threaded port G $\frac{1}{8}$
Threaded port NPT $\frac{1}{8}$
Push-in Ø 8 mm

**Connector module "right",
with or without pressure gauge**

Threaded port G $\frac{3}{8}$
Threaded port NPT $\frac{3}{8}$

**Pneumatic basic module,
electrical basic module & pilot valve**

3-fold (3 × 11 mm)


Service port 2 (A), 4 (B)

Threaded port M7
Push-in Ø 6 mm

**Intermediate module,
with or without pressure gauge**

Threaded port G $\frac{3}{8}$
Threaded port NPT $\frac{3}{8}$

width/station 11 mm, with Type 6524 / 6525



Technical drawings of the 3200 series valve manifold, showing dimensions and connection details.

Top Left View (Front View):

- Overall width: 40.8 (nominal) / 39.6 (actual)
- Overall height: 76.45
- Number of valves: n
- Valve spacing: $33 + (n \times 11)$ / $32.5 + (n \times 11)$
- Connection types: Pneumatic connections G1/4, NPT1/4 + M5 or push-in D10 + D4; Supply connections push-in D6, D4, D1/4" threaded bush M5, M7.
- Other dimensions: 38.1 , 7.7 , 1.5 , 18.6 , 5.5 , 11 , 11 , 88 , 22 , 33 , 51.6 , $103.2 + (n \times 11)$, 11.5 , 38.7 , 35 .

Top Right View (3D Perspective View):

- Shows the manifold assembly with valves and connections.

Bottom Left View (Side View):

- Overall width: 51.6 (nominal) / 44.6 (actual)
- Overall height: 129.25
- Valve spacing: $n \times 11$ / $33 + (n \times 11)$
- Other dimensions: 2 , 119 , 80.3 , 37.7 , 1.9 .


Bottom Right View (Side View):

- Overall width: 77.93
- Overall height: 89.71
- Connection possibilities for standard rail EN 50022 - 35×7.5 or 35×15 .
- Other dimensions: 65 , 10 , 2.5 , 59 .

Note: * Dimension not valid for threaded bush

Dimensions [mm]

width/station 16.5 mm, for Type 6526 / 6527

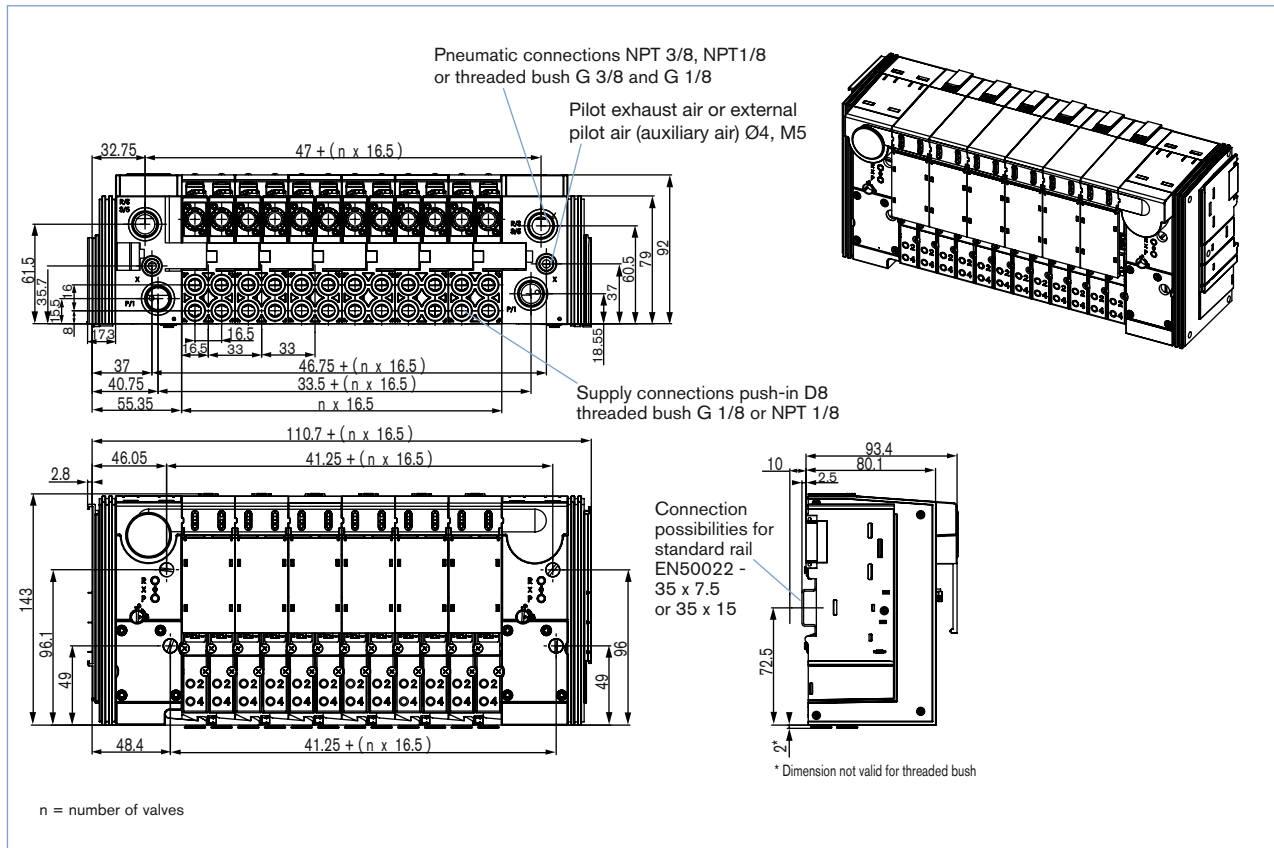

To find your nearest Bürkert facility, click on the orange box →

www.burkert.com

In case of special application conditions,
please consult for advice.

We reserve the right to make technical
changes without notice.

1803/9_EU-en_00891829