



Type 8051 can be combined with...




Type 6223

Solenoid control valve




Type 8693

Digital process controller



Type 8644

Valve islands



PLC

Full bore magmeter for low flow volumes

- Combination of magflowsensor fitting S051 and electronics SE56
- Continuous measurement or Batch Control
- Clean in place (CIP)
- Low-flow measurements on from 3 l/h

The complete full bore magflowmeter Type 8051, which consists of a magnetic sensor fitting Type S051 connected to an electronics Type SE56 (blind in compact version or with display in compact or remote version) is designed for applications with liquids with a minimum conductivity of 5 $\mu\text{S}/\text{cm}$.

Combined with a valve as the actuating element, the complete full bore magflowmeter Type 8051 can control high-precision dosing and filling operations.

General data - S051 sensor fitting

Compatibility	SE56 electronics (see corresponding data sheet)
Materials	
Body	Stainless steel 304 (1.4301)
Wetted part (connection)	Stainless steel 316L (1.4404) or 304 (1.4301) for full lining
Electrode	Stainless steel 316L [Hastelloy C, Titanium, Tantalum, Platinum-rhodium on request]
Lining	PTFE
Seal	FKM, EPDM or FFKM
Electrical connection	2 cable glands PG9

Data complete flowmeter 8051 - (S051 sensor fitting + SE56 electronics)

Pipe diameter	DN03...DN20
Measuring range	0 ... 10 l/h to 0 ... 12500 l/h
Process connection	Thread ISO 228-1, NPT (DIN 11851, SMS 1145, Clamp ISO 2852 or BS 4825, Flanges DIN 2501, ANSI on request)
Medium temperature	see medium temperature chart on page 3
Medium pressure max.	PN16 (232 PSI) (PN40 (580 PSI), on request)
Vacuum resistance	200 mbar (2.9 PSI) absolute at 100 °C (212 °F)
Measurement deviation^{1) 2)}	± 0.2 % of reading (SE56 standard; SE56 blind) ± 0.8 % of reading (SE56 basic)
Repeatability	± 0.1 % (SE56 standard; SE56 blind) ± 0.2 % (SE56 basic)
Minimum conductivity	5 $\mu\text{S}/\text{cm}$ (or 20 $\mu\text{S}/\text{cm}$ with demineralized water)

¹⁾ under reference conditions: water temperature = 20 °C, ambient temperature = 25 °C, constant flow rate during the test, liquid speed > 1 m/s

²⁾ = "measurement bias" as defined in the standard JCGM 200:2012

Environment	
Ambient temperature with	
SE56 standard	-20...+60°C (-4 ...+140°F) (operating and storage)
SE56 basic	-10...+50°C (+14...+122°F) (operating),
	-20...+50°C (-4...+122°F) (storage)
SE56 blind	-20...+40°C (-4...+104°F) (operating and storage)
Standards, directives and certifications	
Protection class	IP65 and IP67 (compact version, SE56 standard or SE56 blind); IP65 (remote version, SE56 standard), IP68 (remote version and junction box filled with resin, SE56 standard); IP65 (compact version, SE56 basic)
Standards and directives CE	The applied standards, which verify conformity with the EU Directives, can be found on the EU Type Examination Certificate and/or the EU Declaration of conformity (if applicable)

Ordering information for complete flowmeter Type 8051


A complete flowmeter Type 8051 consists of a sensor fitting S051 and an electronics SE56.

The following information is necessary for the selection of a complete flowmeter:


- **item no.** of the sensor fitting **Type S051** (see Ordering Chart on page 5)
- **item no.** of the electronics **Type SE56** (see corresponding data sheet or Ordering chart on page 5)

Examples for variations of complete flowmeter (electronics + sensor fitting)


Electronics Type SE56




Standard with display
compact version



Basic (with or without display)
compact version




Without display (blind)
compact version

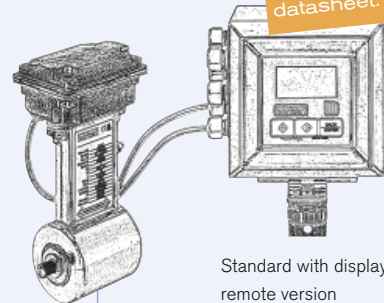


Standard with display
remote version

Sensor fitting Type S051



Compact version
sensor fitting



Remote version
sensor fitting

More info.

For more technical information about this product, click on this box... you will come to our website for this product where you can download the datasheet.

Design and operating principle

The sensor fitting Type S051 consists of a stainless steel pipe section internally lined with insulating material. Two electrodes mounted opposite to each other on the internal surface of the tube generate an electrical signal. The coils generating the magnetic field are placed outside the pipe.


The signal generated by the sensor fitting S051 must be amplified and processed by an electronics (SE56) which outputs an electrical signal proportional to the fluid flow velocity respectively to the flow rate.

Faraday's induction law is the basis for this magnetic flow measurement.


Installation




Avoid the functioning with the pipe partially filled.



During flowmeter operation the pipe must be completely full.




Avoid the installation near curves or hydraulic accessories.



Observe the upstream and downstream distances.

The sensor fitting can be installed into either horizontal or vertical pipes. Mount the sensor fitting in the below as correct indicated ways to obtain an accurate flow measurement.

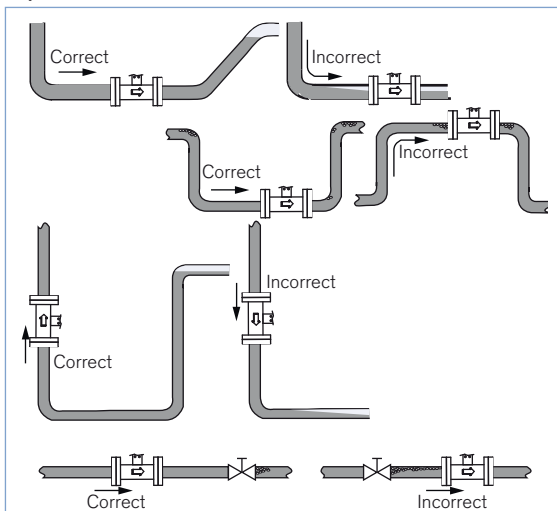

The suitable pipe size is selected using the diagram Flow/Velocity/DN (see diagram to the right).


The flow sensor fitting is not designed for gas flow measurement.

Flow/Velocity/DN diagram

Example:

- Flow: 10 l/min
- Ideal flow velocity: 2 ... 3 m/s
- For these specifications, the diagram indicates a pipe size of DN10

Flow rate

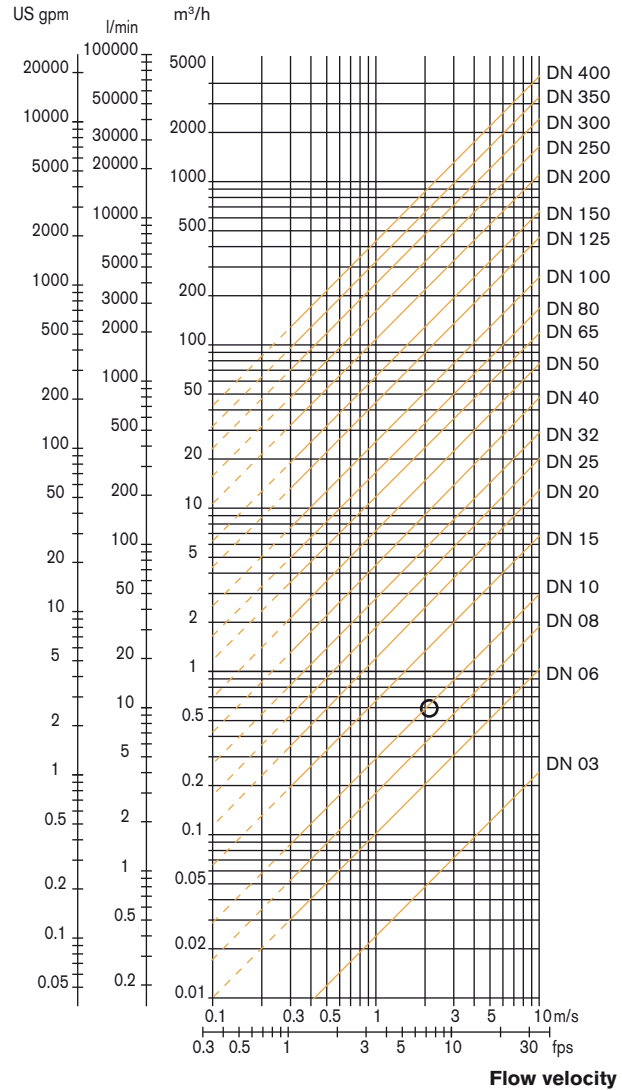


Medium temperature chart

	SE56 standard compact 	SE56 standard remote 	SE56 basic compact 	SE56 blind compact 
 S051 Sensor fitting (compact or remote version)	-20 ... +100 °C (-4 ... +212 °F)	-20 ... +130 °C (-4 ... +266 °F)	-10 ... +100 °C (14 ... +212 °F)	-20 ... +100 °C (-4 ... +212 °F) [up to 130 °C (up to 266 °F) for max. 1 hour]


Dimensions [mm] of Type S051 sensor fitting (without full lining)

NOTE: Dimensions of SE56 electronics, see corresponding data sheet.

Compact version

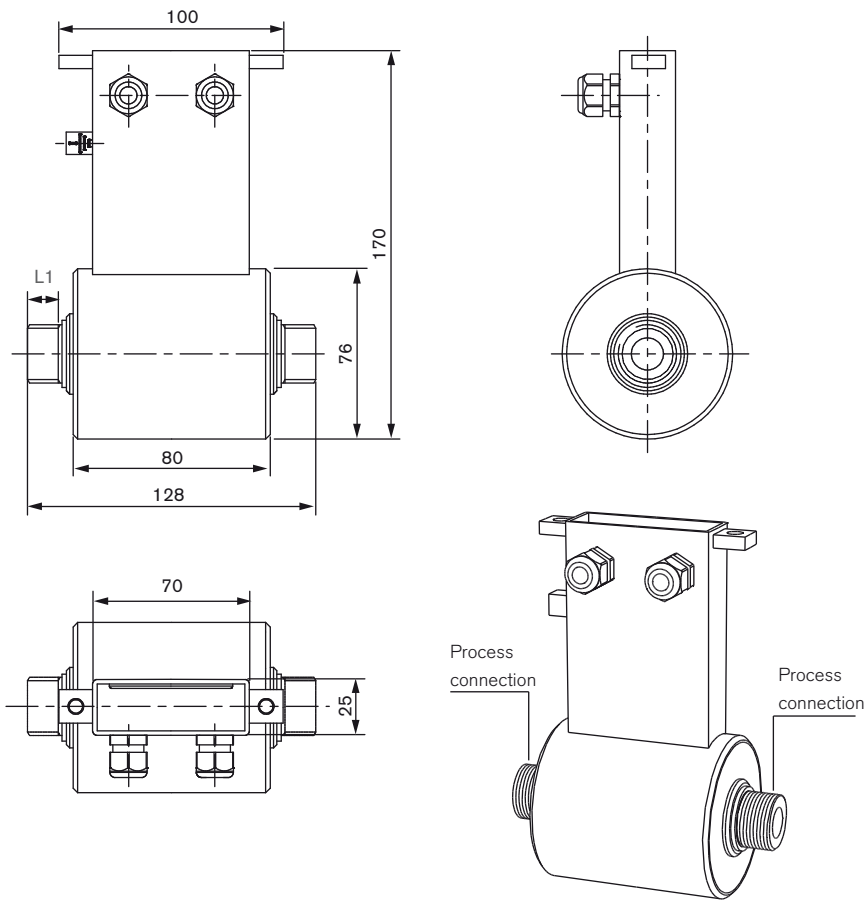

Remote version, with junction box

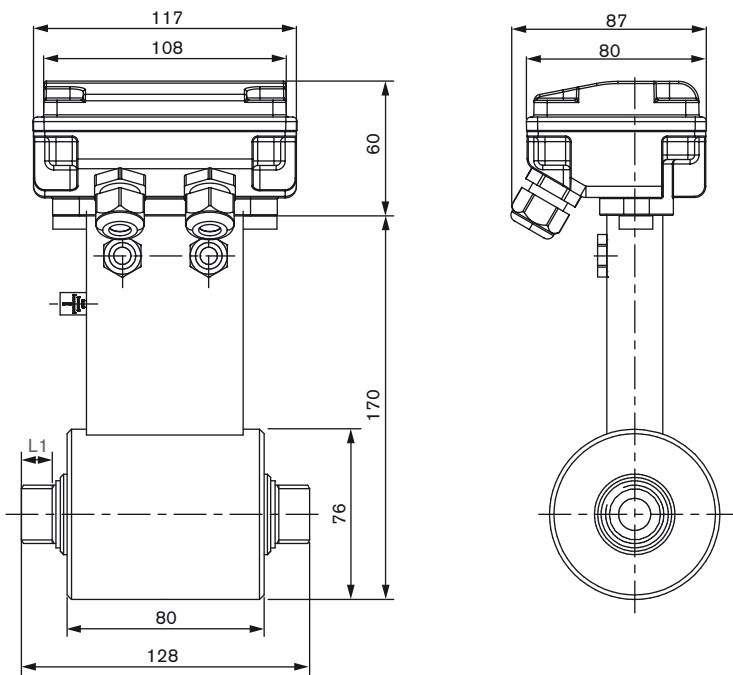

DN [mm]	Thread [inch]	L1 [mm]
03	G or NPT 1/4"	16.4
06	G or NPT 3/8"	16.4
10	G or NPT 1/2"	17.4
15	G or NPT 3/4"	20.0
20	G or NPT 1"	20.0

Ordering chart for flowmeter 8051

A complete flowmeter Type 8051 consists of:

- a sensor fitting Type S051
- an electronics Type SE56

Please order the relevant sensor fitting and the electronics separately!

Sensor fitting Type S051

Description	DN [mm]	Process connection	Flow rate range [l/h]		Body material	Wetted parts materials			Article no.
			min. 0 ... 0.4 ms	max. 0 ... 10 ms		Connection /Electrode	Seal	Lining	
Compact version	03	G ¼" (ISO 228-1)	0 ... 10	0 ... 250	SS 304	SS 316L	FKM	PTFE	554321
		NPT ¼"	0 ... 10	0 ... 250	SS 304	SS 316L	FKM	PTFE	554213
	06	G ⅜" (ISO 228-1)	0 ... 40	0 ... 1000	SS 304	SS 316L	FKM	PTFE	553065
		NPT ⅜"	0 ... 40	0 ... 1000	SS 304	SS 316L	FKM	PTFE	555892
	10	G ½" (ISO 228-1)	0 ... 120	0 ... 3000	SS 304	SS 316L	FKM	PTFE	553374
		NPT ½"	0 ... 120	0 ... 3000	SS 304	SS 316L	FKM	PTFE	555111
	15	G ¾" (ISO 228-1)	0 ... 240	0 ... 6000	SS 304	SS 316L	FKM	PTFE	553481
		NPT ¾"	0 ... 240	0 ... 6000	SS 304	SS 316L	FKM	PTFE	557659
	20	G 1" (ISO 228-1)	0 ... 500	0 ... 12500	SS 304	SS 316L	FKM	PTFE	553539
		NPT 1"	0 ... 500	0 ... 12500	SS 304	SS 316L	FKM	PTFE	553663
Remote version with junction box and 10 m cable (included)	03	G ¼" (ISO 228-1)	0 ... 10	0 ... 250	SS 304	SS 316L	FKM	PTFE	448487
	06	G ⅜" (ISO 228-1)	0 ... 40	0 ... 1000	SS 304	SS 316L	FKM	PTFE	448488
	10	G ½" (ISO 228-1)	0 ... 120	0 ... 3000	SS 304	SS 316L	FKM	PTFE	448489
	15	G ¾" (ISO 228-1)	0 ... 240	0 ... 6000	SS 304	SS 316L	FKM	PTFE	448490
	20	G 1" (ISO 228-1)	0 ... 500	0 ... 12500	SS 304	SS 316L	FKM	PTFE	448491

Further versions on request

Please also use the "request for quotation" form on page 7 for ordering a customized sensor fitting.

Electronics Type SE56 (for more data, refer to data sheet Type SE56)


Description	Power supply	Outputs	Body material	Electrical connection	Article no.
Standard compact version with display	90 ... 265 V AC	2 transistors	Aluminium	6 cable glands	558745
			Stainless steel	6 cable glands	559780
		2 transistors + 4 ... 20 mA	Aluminium	6 cable glands	558747
			Stainless steel	6 cable glands	558306
Standard wall-mounting version with display	90 ... 265 V AC	2 transistors	Aluminium	6 cable glands	559781
			Stainless steel	6 cable glands	558310
		2 transistors + 4 ... 20 mA	Aluminium	6 cable glands	558750
			Stainless steel	6 cable glands	558308
Basic compact version with display	90 ... 265 V AC	2 transistors	Nylon	3 cable glands	562439
		2 transistors + 4 ... 20 mA	Nylon	3 cable glands	562440
	18 ... 63 V DC	2 transistors	Nylon	3 cable glands	562443
		2 transistors + 4 ... 20 mA	Nylon	3 cable glands	562444
Basic compact version without display	90 ... 265 V AC	2 transistors	Nylon	3 cable glands	562441
		2 transistors + 4 ... 20 mA	Nylon	3 cable glands	562442
	18 ... 63 V DC	2 transistors	Nylon	3 cable glands	562445
		2 transistors + 4 ... 20 mA	Nylon	3 cable glands	562446
Blind compact version	20 ... 30 V DC	up to 4 transistors	Stainless steel	2 cable glands	559132
		up to 4 transistors + 4 ... 20 mA	Stainless steel	2 cable glands	559133
		up to 4 transistors + PROFIBUS DP	Stainless steel	2 cable glands	559134

Ordering chart for spare parts/accessories for sensor fitting Type S051


Description	Purpose	No. on drawing	Article no.
Electrode cable, 10 m long	for connection between sensor fitting without junction box Type S054/S055, S051 or S056 and electronics Type SE56*	1	448518
	for connection between sensor fitting with junction box Type S054/S055, S051 or S056 and electronics Type SE56* or for connection between extension cable kit and electronics Type SE56*	4	562851
Coil cable, 10 m long	for connection between sensor fitting without junction box Type S054/S055, S051 or S056 and electronics Type SE56*	2	448519
	for connection between sensor fitting with junction box Type S054/S055, S051 or S056 and electronics Type SE56* or for connection between extension cable kit and electronics Type SE56*	5	562852
Extension cable kit	including a connecting box and resin	3	562853

* (see corresponding data sheet)

Sensor fitting Type S051 without junction box

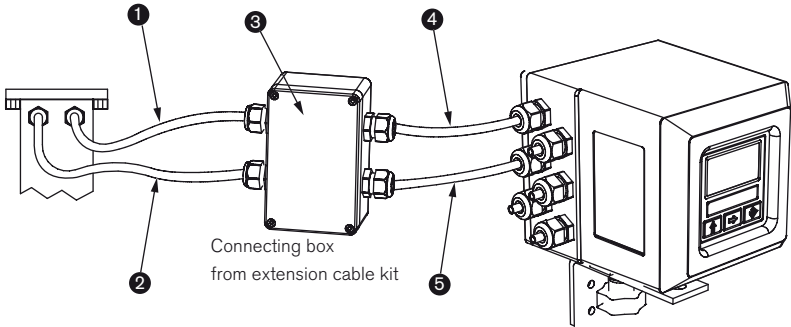

Sensor fitting Type S051 with junction box

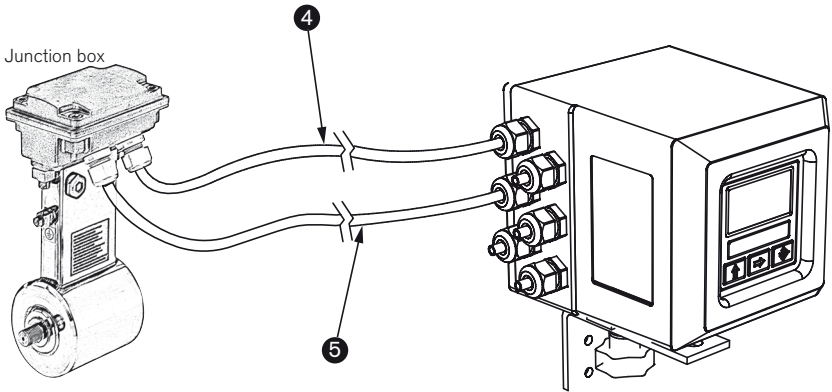

Further versions on request

Electrical connection
Electrode and coil cables length

Sanitary sensor fitting Type S051 - request for quotation

Please fill out this form and send to your local Bürkert Sales Centre* with your inquiry or order.

Note

You can fill out the fields directly in the PDF file before printing out the form.



NOTE:

Please take into account that the sensor fitting Type S051 must be associated with one of the electronics Type SE56. If only the sensor fitting is ordered, please indicate on your order the version (standard, blind or basic) or better the item no. of the electronics Type SE56 with which it will be associated

Company:	Contact person:
Customer no.:	Dept.:
Address:	Tel./Fax:
Town / Postcode:	E-mail:

■ Full Bore Magflow sensor fitting S051

Quantity: Desired delivery date::

■ Pipe diameter

☐ DN03☐ DN06☐ DN10☐ DN15☐ DN20

■ Process fitting connection:

External thread

☐ ISO 228☐ DIN 11851☐ NPT☐ SMS 1145

Clamp

☐ ISO 2852☐ BS 4825

Flange

☐ DIN 2501☐ ANSI

■ Pressure:

☐ PN16☐ PN40

■ Materials:

Seal

☐ FKM☐ EPDM☐ FFKM

Wetted parts

☐ 316L☐ 304 and PTFE full liningElectrodes¹⁾☐ 316L (2 M.E.)*☐ Hastelloy (2 M.E. + 2 G.E.)*☐ Tantalum (2 M.E. + 2 G.E.)*☐ Titanium (2 M.E. + 2 G.E.)*☐ Platinum (2 M.E. + 2 G.E.)*

* M.E. = measuring electrode and G.E. = ground electrode

■ Flowmeter version:

☐ Compact☐ Remote (10 m cable included)

■ Cable length:

 meter (for cable length > 20 m a preamplifier is included. **Caution! Price increase**)¹⁾ If the pipe is in plastic then it is advised to choose 3 electrodes, if it is in metal then 2 electrodes are enough.

Electronics SE56



When you click on the orange box "More info.", you will come to our website for the resp. product where you can download the data sheet, and then you can fill out the SE56 request for quotation form.

To find your nearest Bürkert facility, click on the orange box →

www.burkert.com

In case of special application conditions,
please consult for advice.

Subject to alteration.
© Christian Bürkert GmbH & Co. KG

1803/10_EU-en_00895027