


## LFM Liquid Flow Meter



- High dynamic flow measurement
- Applicable for liquid flow measurement up to 600 ml/min (36 l/h)
- No moving parts in medium
- Fieldbus optional

Type 8709 can be combined with...




**Type 1150**

Multi-channel  
program controller



**Type 6606**

2/2 way  
Solenoid Valve



**Type 6011**

2/2 way  
Solenoid Valve

Type 8709 is an instrument for liquid flow measurement in process technology. The actual value supplied by the sensor is transmitted through the digital electronics and over a standard signal output or a field bus interface.

In the device two calibration curves can be stored, which the user is able to switch between. MassFlowCommunicator software can be used for parameterisation and diagnosis.

Typical application areas of liquid measurements are:


- Heat treatment,
- Machine tools,
- Fuel cell technology,
- Packaging technology,
- Material coating,
- Bio reactors.

In particular, the Type 8709 meets the requirement of IP65.

Technical data			
<b>Full scale range (<math>Q_{nom}</math>)</b>	0.9 to 36 l/h (15 to 600 ml/min) re. water	<b>Output signal</b> (actual value)	0-5 V, 0-10 V, 0-20 mA or 4-20 mA
<b>Operating medium</b>	Clean and low viscous liquids	<b>Max. current</b> (voltage output)	10 mA
<b>Viscosity</b>	0.4 to 4 cSt	<b>Max. burden</b> (current output)	600 $\Omega$
<b>Max. operating pressure</b> (at inlet)	Up to max. 10 barg; typical max. 2 barg	<b>Alternative output signal</b>	Digital with fieldbus: ▪ PROFIBUS DP V1 ▪ DeviceNet ▪ CANopen
<b>Calibration medium</b>	Water (conversion to operating medium with correcting function)	<b>Type of protection</b>	IP65
<b>Medium temperature</b>	10 to +40 °C	<b>Dimensions [mm]</b> (without compression fittings)	115 x 137.5 x 37 (BxHxT)
<b>Ambient temperature</b>	0 to +55 °C	<b>Total weight</b>	ca. 1100 g
<b>Accuracy</b>	$\pm 1.5\%$ o.R. $\pm 0.5\%$ F.S.	<b>Installation</b>	Horizontal or vertical
<b>Repeatability</b>	$\pm 0.5\%$ F.S.	<b>Light emitting diodes</b> (Default function, other functions programmable)	Indication for: 1. Power 2. Communication 3. Limit 4. Error
<b>Turn-down ratio</b>	1:10	<b>Binary inputs</b> (Default function, other functions programmable)	Three: 1. not assigned 2. not assigned 3. not assigned
<b>Response time (<math>t_{95\%}</math>)</b>	< 500 ms	<b>Binary outputs</b> (Default function, other functions programmable)	Two relay outputs for: 1. Limit ( $Q_{nom}$ almost reached) 2. Error (e.g. sensor failure) Capacity: max. 60 V, 1 A, 60 VA
<b>Body material</b>	Stainless steel		
<b>Housing</b>	PBT		
<b>Sealing material</b>	FKM, EPDM, FFKM		
<b>Port connection</b>	G $\frac{1}{8}$ , NPT $\frac{1}{8}$ , G $\frac{1}{4}$ , NPT $\frac{1}{4}$		
<b>Electrical Connection</b>	Round socket, 8 pin, Sub-HD socket, 15 pin, M12 plug or socket, 5 pin (with fieldbus)		
<b>Operating voltage</b>	24 V DC $\pm 10\%$		
<b>Residual ripple</b>	< 2%		
<b>Power consumption</b>	Max. 2.5 W (5 W with fieldbus version)		

## Measurement principle

The sensor measures the flow by means of differential pressure. An orifice in the main channel causes pressure loss at liquid flow which is measured by the differential pressure sensor. The sensor feedbacks a precise and temperature compensated signal from which the electronics calculate the corresponding flow.

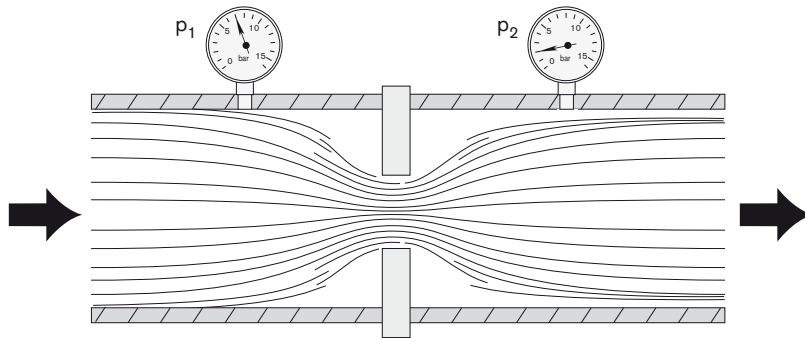

To avoid a blockage of the aperture by contaminated mediums an upstream filter is recommended.

### Notes regarding the selection of the unit

The decisive factors for the perfect functioning of an LFM within the application are the fluid compatibility, the pressure range and the correct choice of the flow meter range. The pressure loss over the LFM averages in typical applications approx. 500 mbar, with up to 2 barg inlet pressure.

The specification of the inlet pressure,  $p_{1max}$ , which can be expected is necessary for the selection of the suitable differential pressure sensor.


- ▶ The request form on page 5 contains the relevant fluid specification. Please use the experience of Bürkert engineers already in the design phase and provide us with a copy of your request containing the necessary data together with your inquiry or order.

Ordering Chart for Accessories

Article	Article no.
<b>Connectors/Cables</b>	
Round plug M16 8 pin (solder connection)	918299
Round plug M16 8 pin with 5 m cable	787733
Round plug M16 8 pin with 10 m cable	787734
Plug D-Sub HD15 15 pin with 5 m cable	787735
Plug D-Sub HD15 15 pin with 10 m cable	787736
<b>Adapters<sup>3)</sup></b>	
RS232 adapter for connection to a computer, connection with an extension cable (item no. 917 039)	654757
Extension cable for RS232 9 pin socket/plug 2 m	917039
RS422-Adapter (RS485 compatible)	666370
USB-Adapter (Version 1.1, USB socket type B)	670696
USB connection cable 2 m	772299
Adapter for manual setting of bus address	667525
Software MassFlowCommunicator	Download from <a href="http://www.buerkert.com">www.buerkert.com</a>
<b>Accessories for Fieldbus</b>	<b>PROFIBUS DP (B-codiert)</b> <b>DeviceNet/ CANopen (A-codiert)</b>
M12-Plug <sup>4)</sup>	918198
M12-socket (coupling) <sup>4)</sup>	918447
Y-junction <sup>4)</sup>	902098
T-junction	918531
Shut-off resistor	902553
GSD-Datei (PROFIBUS), EDS-Datei (DeviceNet, CANopen)	Download from <a href="http://www.buerkert.com">www.buerkert.com</a> (type 8712)


<sup>3)</sup> The adapters serve mainly for initial operation or diagnosis. Those are not obligatory for continuous operation.

<sup>4)</sup> The two M12 connectors as listed above cannot be used together on the same side of the Y-junction. At least one of the two M12 connection needs to be a prefabricated cable which uses typically a thinner connector.

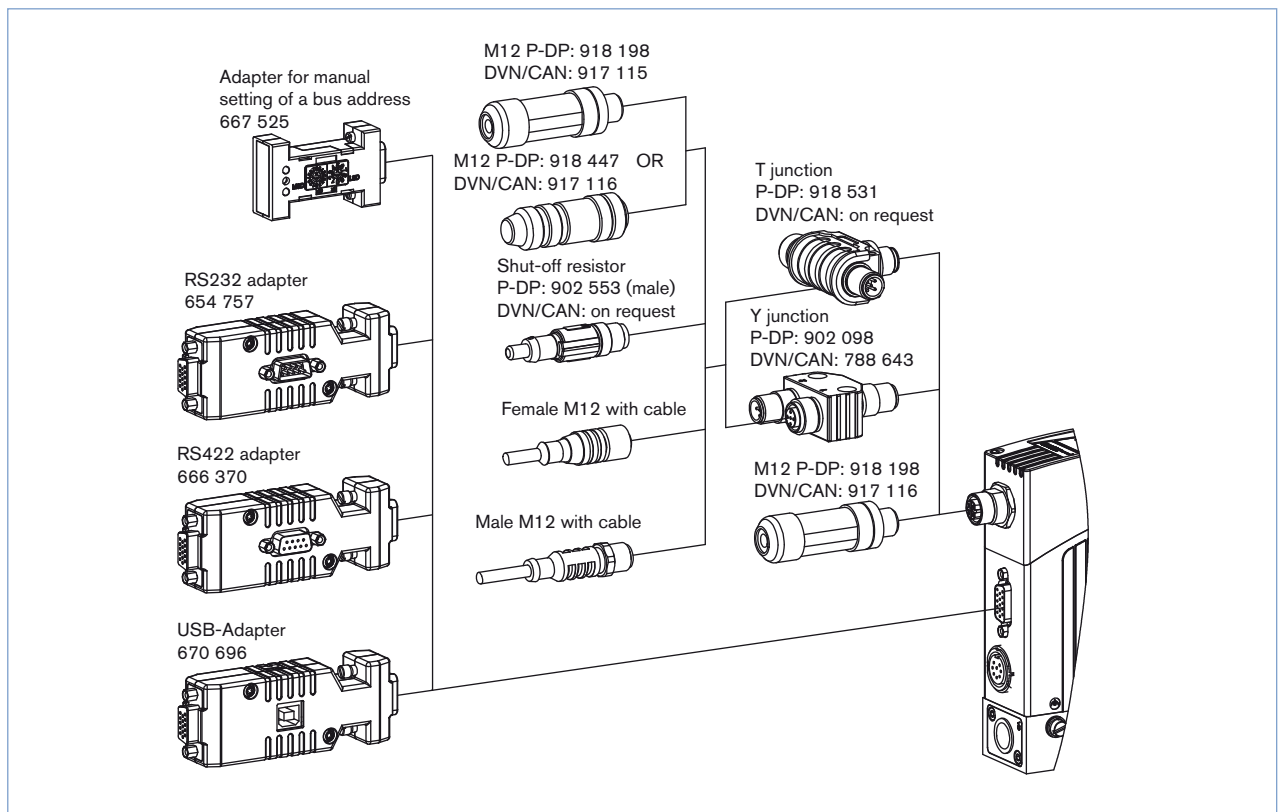


DTS 1000116945 EN Version: E Status: RL (released | freigegeben | valide) printed: 05.03.2018

Pin Assignment

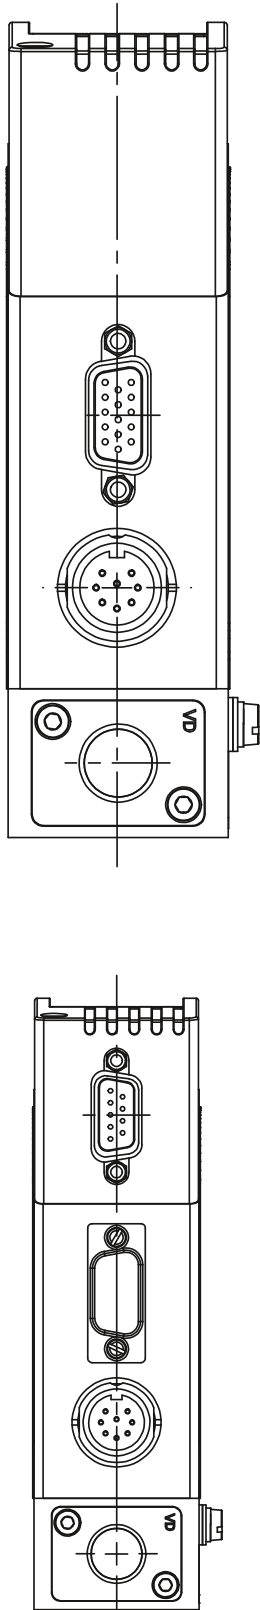

Socket D-Sub HD15

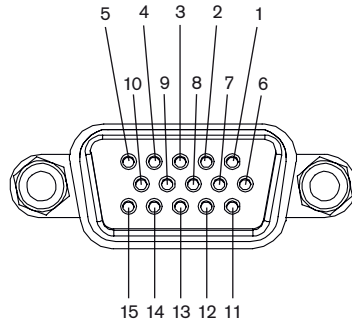


Pin	Assignment	
	Analogue Control	Bus control
1	N.C.	N.C. <sup>5)</sup>
2	N.C.	N.C.
3	Actual value output +	N.C.
4	Binary input 2	
5	12 V-Output (only for internal company use)	
6	RS232 TxD (direct connection to computer)	
7	Binary input 1	
8	GND (for binary inputs)	
9	only company internal use (do not connect!)	
10	12 V-Output (only for internal company use)	
11	12 V-Output (only for internal company use)	
12	Binary input 3	
13	Actual value output GND	N.C.
14	RS232 RxD (direct connection to computer)	
15	DGND (for RS232-interface)	

<sup>5)</sup>N.C.: not connected (not used)

Note:

- Optional Pin 1 and 2 with bus version as transmitter input possible
- The cable length for RS232/ flow value signal is limited to 30 meters.


Socket M16, round, 8 pin

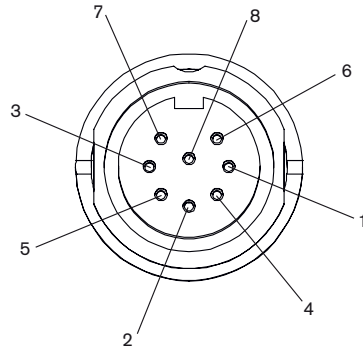

Pin	Assignment
1	24 V-Supply +
2	Relay 1 – reference contact
3	Relay 2 – reference contact
4	Relay 1 – normally closed contact
5	Relay 1 – normally open contact
6	24 V-Supply GND
7	Relay 2 – normally open contact
8	Relay 2 – normally closed contact


Socket D-Sub 9 pin

(only with fieldbus version)

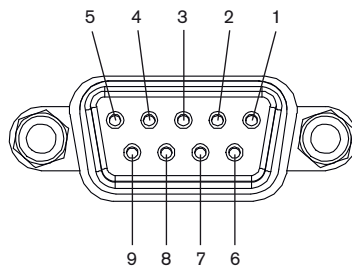


Pin	Assignment	
	PROFIBUS DP	DeviceNet/ CANopen
1	Shield	Shield
2	N.C.	CAN-L data line
3	RxD/TxD - P (B-line)	GND
4	RTS (control signal for repeater)	N.C.
5	GND	N.C.
6	VDD (only for termination resistor)	N.C.
7	N.C.	CAN-H data line
8	RxD/TxD - N (A-line)	N.C.
9	N.C.	N.C.

Pin Assignment (continued)

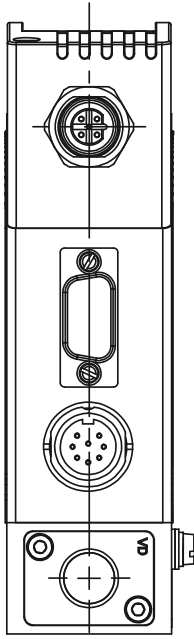

PROFIBUS DP – socket B-coded M12 (DPV1 max. 12 Mbaud)	Pin	Assignment
	1	VDD (only for termination resistor)
	2	RxD/TxD – N (A-line)
	3	DGND
	4	RxD/TxD – P (B-line)
	5	N.C.
DeviceNet/ CANopen – Plug A-coded M12	Pin	Assignment
	1	Shield
	2	N.C. <sup>6)</sup>
	3	DGND
	4	CAN_H
	5	CAN_L
<sup>6)</sup> Optional configuration with 24 V DC possible for power supply via fieldbus connector. With this no power supply connection on round M16 plug needed.		

Dimensions [mm]

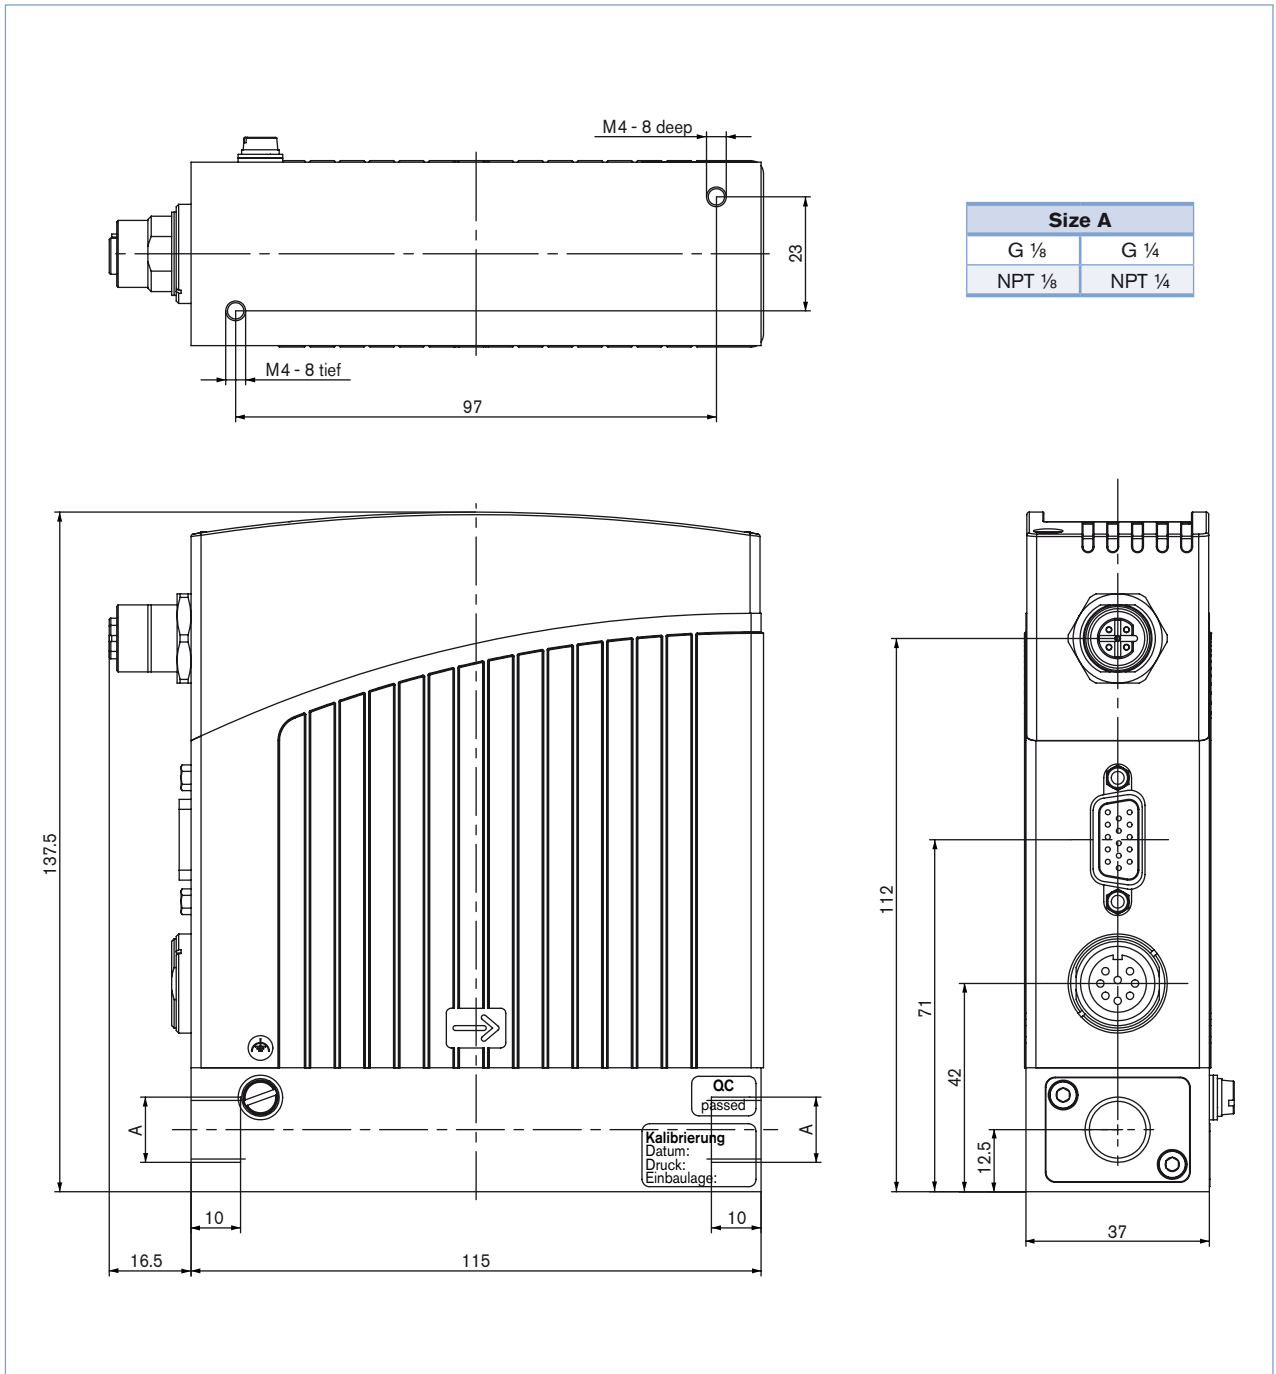

In devices without fieldbus communication there is no electrical M12 connector in the upper housing part.

**Note**  
You can fill out the fields directly in the PDF file before printing out the form.

**LFC/LFM applications - Request for quotation**

▶ Please fill out and send to your nearest Bürkert facility with your inquiry or order

Company	Contact person
Customer no.	Department
Street	Tel./Fax
Postcode/Town	E-Mail

LFC applications     LFM applications     Quantity     Required delivery date

**Medium data**

Fluids

Density [kg/m<sup>3</sup>] at 20 °C  at 40 °C

Viscosity [cSt] at 5 °C  at 20 °C  at 40 °C

Medium temperature [°C or °F]  °C  °F

Abrasive components/solid particles  no  yes, as follows:

**Fluidic data**

Maximum flow  $Q_{nom}$   l/h  l/min  
 kg/h  kg/min  
 ml/h  ml/min

Minimum flow  $Q_{min}$   l/h  l/min  
 kg/h  kg/min  
 ml/h  ml/min

Inlet pressure at  $Q_{nom}$   $p_1 =$   barg ■

Outlet pressure at  $Q_{nom}$   $p_2 =$   barg ■

Max. inlet pressure  $p_{1max}$   barg ■

Pipeline (external-Ø)  mm  inch

LFC/LFM Port connection  without screw-in fitting  
 ¼ G-thread  ¼ G-thread (DIN ISO 228/1)  
 ¼ NPT-thread  ¼ NPT-thread (ANSI B1.2)  
 with screw-in fitting

Installation of LFC/LFM  horizontal, valve upright (standard)  horizontal, valve to the side  
 vertical, flow upwards  vertical, flow downwards

Ambient temperature

**Material data**

Body material  Stainless steel

Seal material  FKM  EPDM  Other:

**Electrical data**

Output Signal

<b>with standard signal</b>	<b>with fieldbus</b>
<input type="checkbox"/> 0-5 V	<input type="checkbox"/> PROFIBUS DP
<input type="checkbox"/> 0-10 V	<input type="checkbox"/> DeviceNet
<input type="checkbox"/> 0-20 mA	<input type="checkbox"/> CANopen
<input type="checkbox"/> 4-20 mA	

■ Please quote all pressure values as overpressure with respect to atmospheric pressure [barg]

DTS 1000116945 EN Version: E Status: RL (released | freigegeben | valide) printed: 05.03.2018

To find your nearest Bürkert facility, click on the orange box → [www.burkert.com](http://www.burkert.com)

In case of special application conditions, please consult for advice

Subject to alterations.  
© Christian Bürkert GmbH & Co. KG

1803/4\_EU-en\_00895112